




## UV Beam Shaping with $\text{CaF}_2$ – Microlens Arrays

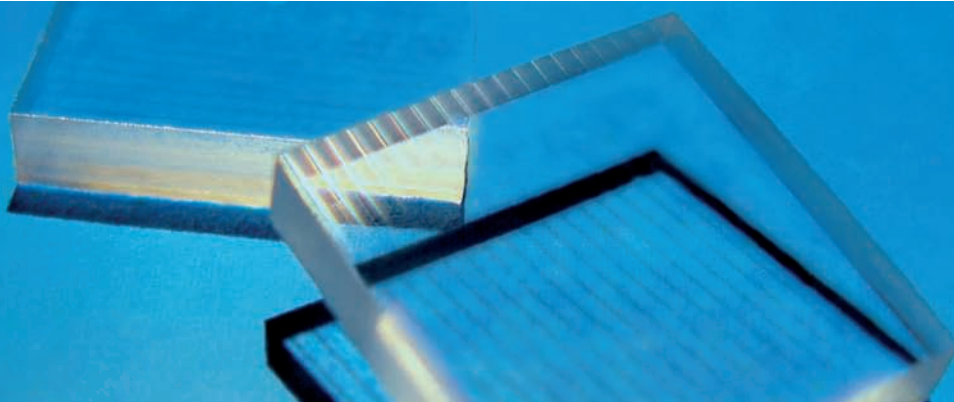

Laser beam homogeneity of UV lasers is a challenge. For a large range of applications a smooth beam profile of an arbitrary input intensity distribution at a high power density is required.

In particular for UV-lasers such as Excimer lasers and diode pumped frequency tripled lasers with their unique ability to deliver high pulse energies, Microlens Arrays of  $\text{CaF}_2$  are suitable optics to produce homogenous intensity distributions with a long durability which is especially needed in industrial applications.

Jenoptik  $\text{CaF}_2$  – Microlens Arrays can reshape nearly every input intensity distribution into well-defined, reproducible and custom tophat far-field profiles with a high efficiency over a long lifetime.

#### Features:

- Excellent Deep UV Transmission
- Higher damage threshold in the DUV compared to quartz
- Custom design
- High efficiency
- Steep slopes of tophat profile
- Low modulation
- Insensitive to input beam shape

#### Applications:

- Illumination systems for Semiconductor Industry
- Ophthalmology
- Laser materials processing
- Printing technology
- Measuring systems


# UV Beam Shaping with CaF<sub>2</sub> – Microlens Arrays

## Specifications

Uniformity:	< 7 %
Efficiency:	> 92 % *
Max. lens sag:	2 μm
Clear aperture:	5 mm to 120 mm
Laser wavelengths:	> 157 nm
Material:	CaF <sub>2</sub>
AR-Coating:	optional laser resistant coatings
Product number:	029143

\* with AR-Coating

### Typical result for a homogenization with CaF<sub>2</sub> Microlens Arrays @ 193 nm

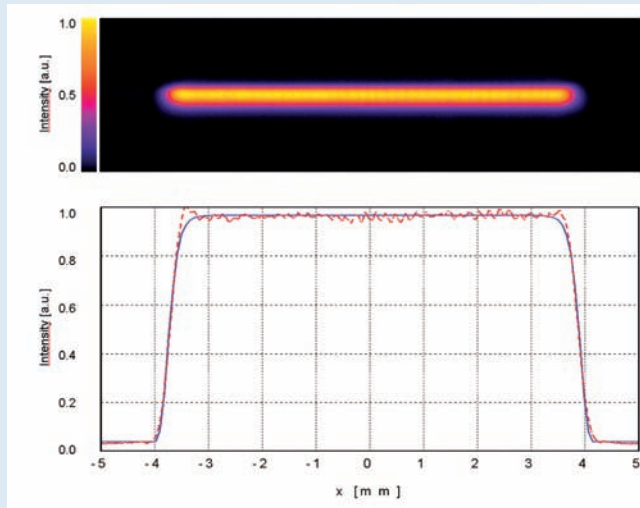

#### Setup:

Imaging tandem Microlens Array assembly	
Input Laser beam size (1/e <sup>2</sup> ):	3 mm x 6 mm
Laser divergence:	2 x 1 mrad

#### CaF<sub>2</sub> Microlens Arrays

Lens pitch:	0.5 mm
Focal length:	30 mm

#### Results:

Uniformity:	< 6.3 %
Efficiency:	> 92.2 %
Output Laser beam size (1/e <sup>2</sup> ):	0.54 mm x 7.8 mm

It is our policy to constantly improve the design and specifications. Accordingly, the details represented herein cannot be regarded as final and binding.



JENOPTIK | Optical Systems  
Microoptics Business Unit  
JENOPTIK Laser, Optik, Systeme GmbH  
Goeschwitzer Strasse 25 | 07745 Jena | Germany  
Phone +49 3641 65-2442 | Fax -2443  
microoptics@jenoptik.com | www.jenoptik-los.com

MEMS Optical, Inc.  
205 Import Circle | Huntsville | AL 35806 | USA  
Phone +1 256 859-1886 | Fax +1 256 859-5890  
info@memsoptical.com | www.memsoptical.com

029143-003-99-14-0908-en